



BUH1015 BUH1015HI

HIGH VOLTAGE FAST-SWITCHING NPN POWER TRANSISTOR

- STMicroelectronics PREFERRED SALESTYPES
- HIGH VOLTAGE CAPABILITY
- VERY HIGH SWITCHING SPEED



APPLICATIONS:

- HORIZONTAL DEFLECTION FOR COLOUR TV AND MONITORS

DESCRIPTION

The BUH1015 and BUH1015HI are manufactured using Multi-epitaxial Mesa technology for cost-effective high performance and use a Hollow Emitter structure to enhance switching speeds.

The BUH series is designed for use in horizontal deflection circuits in televisions and monitors.

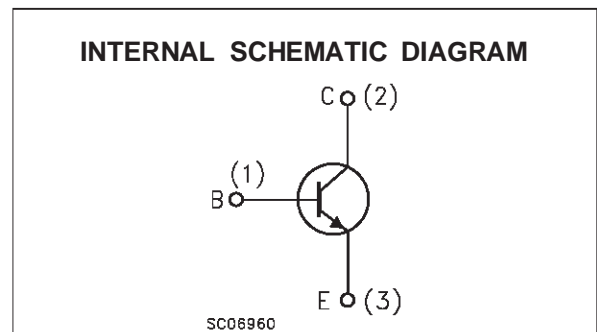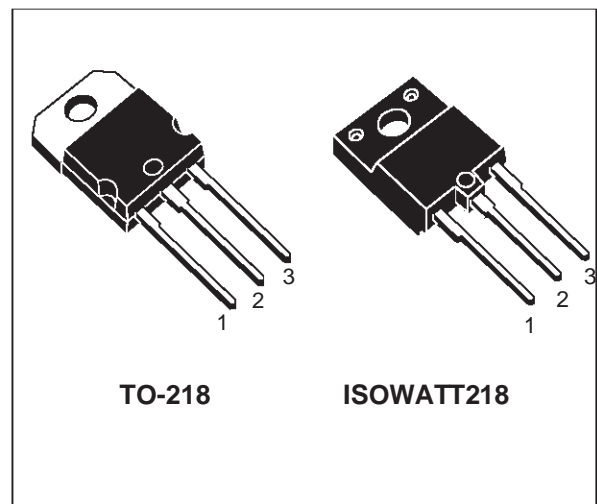

ABSOLUTE MAXIMUM RATINGS

| Symbol | Parameter | Value | Unit | |
|-----------|---|------------|------|---|
| V_{CBO} | Collector-Base Voltage ($I_E = 0$) | 1500 | V | |
| V_{CEO} | Collector-Emitter Voltage ($I_B = 0$) | 700 | V | |
| V_{EBO} | Emitter-Base Voltage ($I_C = 0$) | 10 | V | |
| I_C | Collector Current | 14 | A | |
| I_{CM} | Collector Peak Current ($t_p < 5$ ms) | 18 | A | |
| I_B | Base Current | 8 | A | |
| I_{BM} | Base Peak Current ($t_p < 5$ ms) | 11 | A | |
| P_{tot} | Total Dissipation at $T_c = 25$ °C | 160 | 70 | W |
| T_{stg} | Storage Temperature | -65 to 150 | °C | |
| T_j | Max. Operating Junction Temperature | 150 | °C | |

BUH1015/BUH1015HI

THERMAL DATA


| | | | TO-218 | ISOWATT218 | |
|----------------|----------------------------------|-----|--------|------------|-----------------------------|
| $R_{thj-case}$ | Thermal Resistance Junction-case | Max | 0.78 | 1.8 | $^{\circ}\text{C}/\text{W}$ |

ELECTRICAL CHARACTERISTICS ($T_{case} = 25^{\circ}\text{C}$ unless otherwise specified)


| Symbol | Parameter | Test Conditions | Min. | Typ. | Max. | Unit |
|------------------|--|--|--------|------------|----------|------------------------------|
| I_{CES} | Collector Cut-off Current ($V_{BE} = 0$) | $V_{CE} = 1500\text{ V}$ $V_{CE} = 1500\text{ V}$ $T_j = 125^{\circ}\text{C}$ | | | 0.2 2 | mA mA |
| I_{EBO} | Emitter Cut-off Current ($I_C = 0$) | $V_{EB} = 5\text{ V}$ | | | 100 | μA |
| $V_{CEO(sus)}^*$ | Collector-Emitter Sustaining Voltage ($I_B = 0$) | $I_C = 100\text{ mA}$ | 700 | | | V |
| V_{EBO} | Emitter-Base Voltage ($I_C = 0$) | $I_E = 10\text{ mA}$ | 10 | | | V |
| $V_{CE(sat)}^*$ | Collector-Emitter Saturation Voltage | $I_C = 10\text{ A}$ $I_B = 2\text{ A}$ | | | 1.5 | V |
| $V_{BE(sat)}^*$ | Base-Emitter Saturation Voltage | $I_C = 10\text{ A}$ $I_B = 2\text{ A}$ | | | 1.5 | V |
| h_{FE}^* | DC Current Gain | $I_C = 10\text{ A}$ $V_{CE} = 5\text{ V}$ $I_C = 10\text{ A}$ $V_{CE} = 5\text{ V}$ $T_j = 100^{\circ}\text{C}$ | 7 5 | 10 | 14 | |
| t_s t_f | RESISTIVE LOAD Storage Time Fall Time | $V_{CC} = 400\text{ V}$ $I_C = 10\text{ A}$ $I_{B1} = 2\text{ A}$ $I_{B2} = -6\text{ A}$ | | 1.5 110 | | μs ns |
| t_s t_f | INDUCTIVE LOAD Storage Time Fall Time | $I_C = 10\text{ A}$ $f = 31250\text{ Hz}$ $I_{B1} = 2\text{ A}$ $I_{B2} = -6\text{ A}$ $V_{ceflyback} = 1200 \sin\left(\frac{\pi}{5} 10^6\right) t \text{ V}$ | | 4 220 | | μs ns |
| t_s t_f | INDUCTIVE LOAD Storage Time Fall Time | $I_C = 6\text{ A}$ $f = 64\text{ KHz}$ $I_{B1} = 1\text{ A}$ $V_{beoff} = -2\text{ V}$ $V_{ceflyback} = 1100 \sin\left(\frac{\pi}{5} 10^6\right) t \text{ V}$ | | 3.7 200 | | μs ns |

* Pulsed: Pulse duration = 300 μs , duty cycle 1.5 %


Safe Operating Area For TO-218

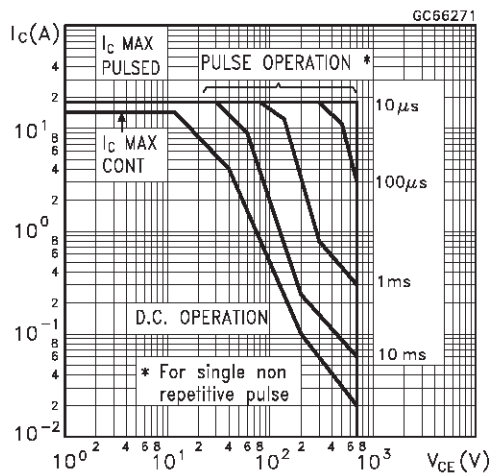


Safe Operating Area For ISOWATT218

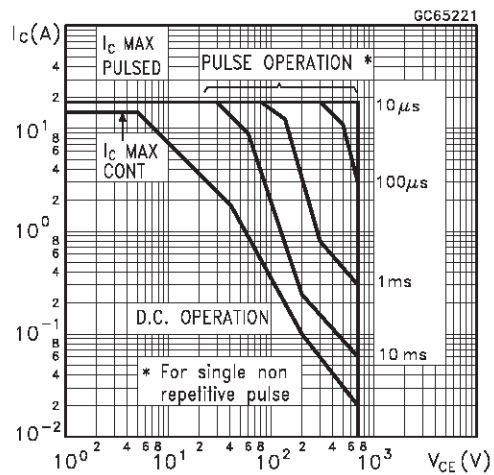


Thermal Impedance for TO-218

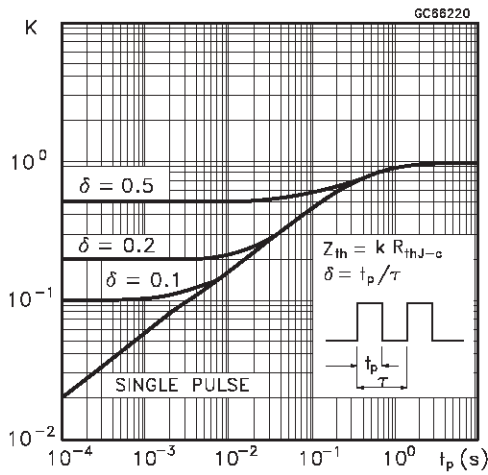


Thermal Impedance for ISOWATT218

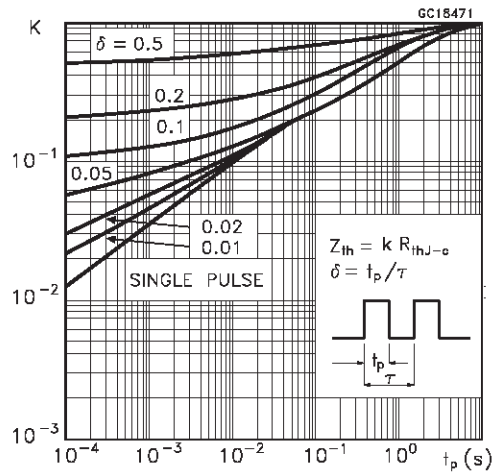


Derating Curve

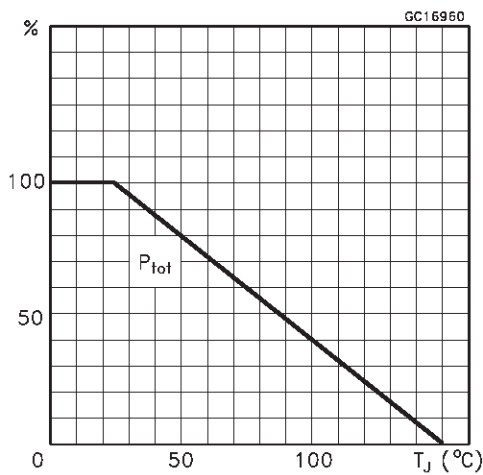


DC Current Gain

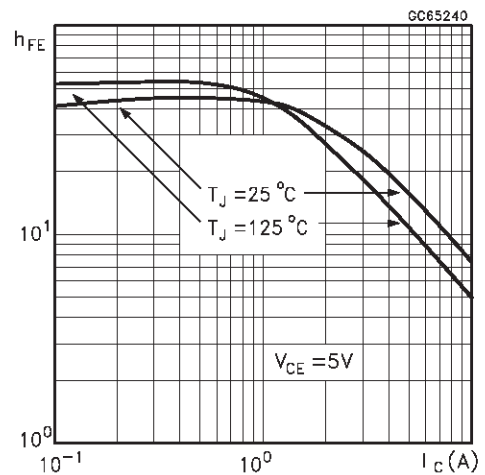


Collector Emitter Saturation Voltage

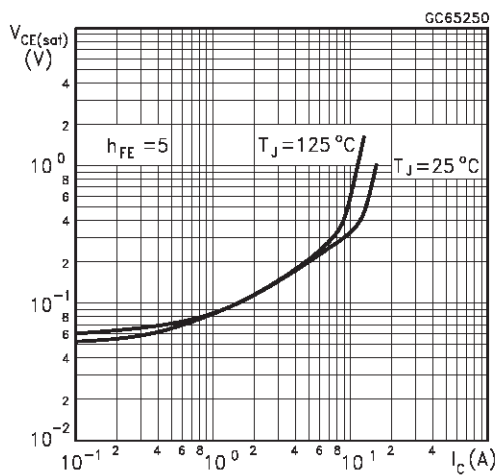


Base Emitter Saturation Voltage

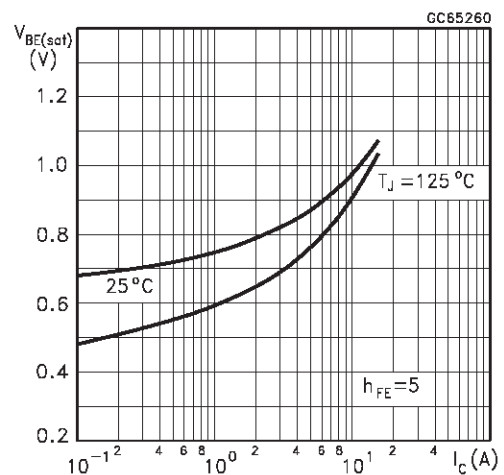


Power Losses at 64 KHz

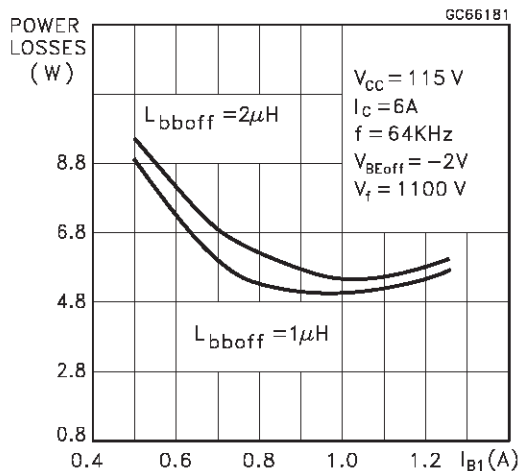

Switching Time Inductive Load at 64KHz
(see figure 2)

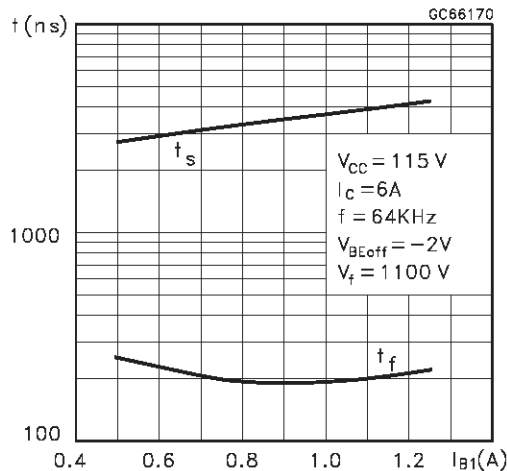

Reverse Biased SOA

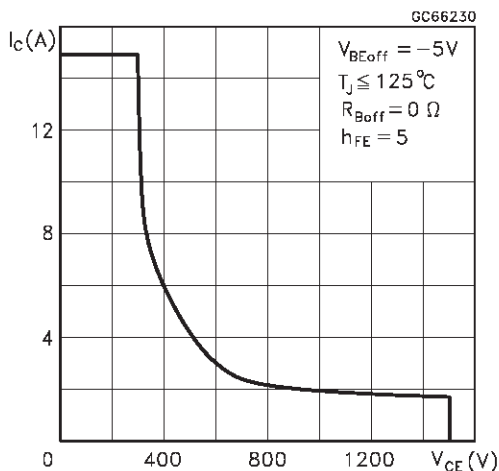

BASE DRIVE INFORMATION

In order to saturate the power switch and reduce conduction losses, adequate direct base current I_{B1} has to be provided for the lowest gain h_{FE} at $T_j = 100^\circ\text{C}$ (line scan phase). On the other hand, negative base current I_{B2} must be provided the transistor to turn off (retrace phase). Most of the dissipation, especially in the deflection application, occurs at switch-off so it is essential to determine the value of I_{B2} which minimizes power losses, fall time t_f and, consequently, T_j . A new set of curves have been defined to give total power losses, t_s and t_f as a function of I_{B1} at 64 KHz scanning frequencies for choosing the

optimum drive. The test circuit is illustrated in figure 1.

The values of L and C are calculated from the following equations:

$$\frac{1}{2} L (I_C)^2 = \frac{1}{2} C (V_{CEfly})^2$$

$$\omega = 2 \pi f = \frac{1}{\sqrt{LC}}$$

Where I_C = operating collector current, V_{CEfly} = flyback voltage, f = frequency of oscillation during retrace.

Figure 1: Inductive Load Switching Test Circuits.



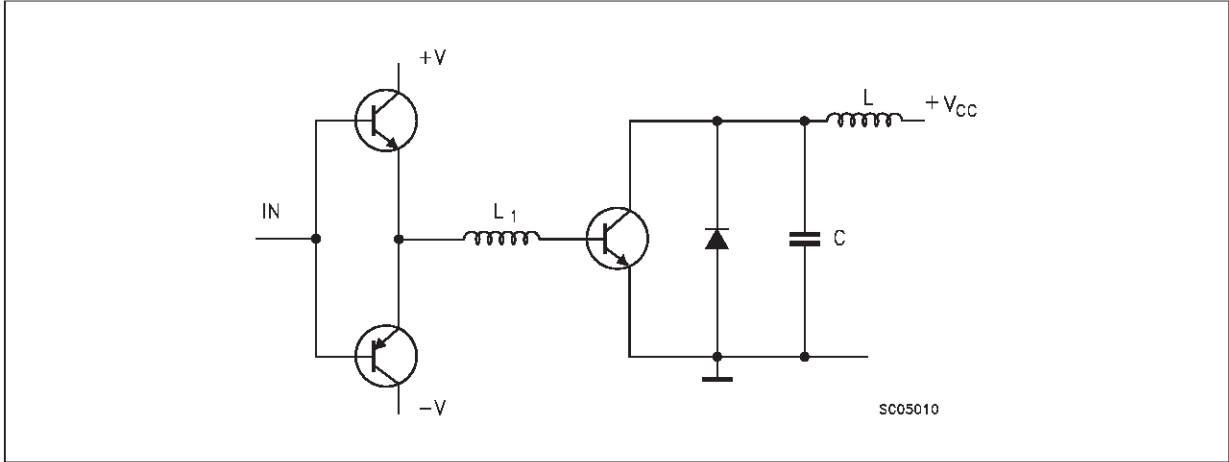


Figure 2: Switching Waveforms in a Deflection Circuit

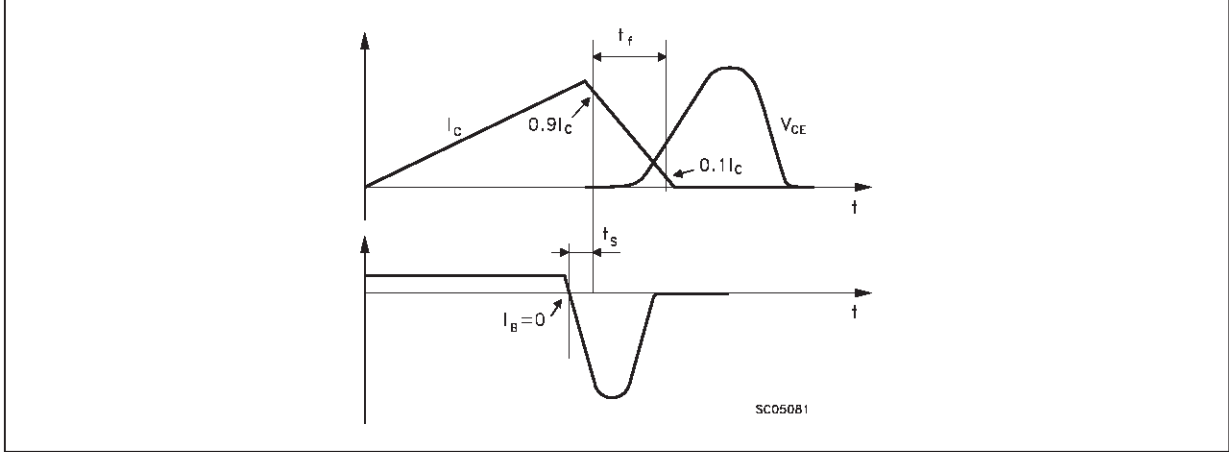


TO-218 (SOT-93) MECHANICAL DATA

| DIM. | mm | | | inch | | |
|------|------|------|------|-------|-------|-------|
| | MIN. | TYP. | MAX. | MIN. | TYP. | MAX. |
| A | 4.7 | | 4.9 | 0.185 | | 0.193 |
| C | 1.17 | | 1.37 | 0.046 | | 0.054 |
| D | | 2.5 | | | 0.098 | |
| E | 0.5 | | 0.78 | 0.019 | | 0.030 |
| F | 1.1 | | 1.3 | 0.043 | | 0.051 |
| G | 10.8 | | 11.1 | 0.425 | | 0.437 |
| H | 14.7 | | 15.2 | 0.578 | | 0.598 |
| L2 | - | | 16.2 | - | | 0.637 |
| L3 | | 18 | | | 0.708 | |
| L5 | 3.95 | | 4.15 | 0.155 | | 0.163 |
| L6 | | 31 | | | 1.220 | |
| R | - | | 12.2 | - | | 0.480 |
| Ø | 4 | | 4.1 | 0.157 | | 0.161 |

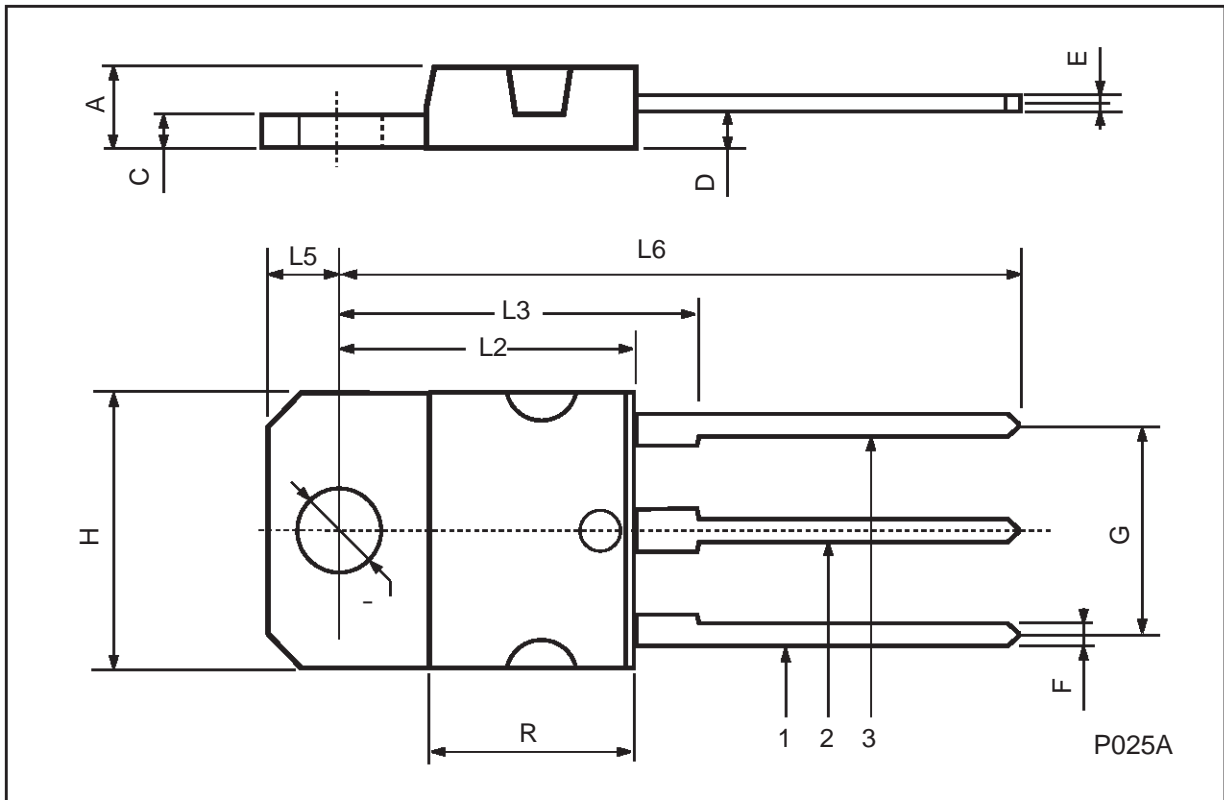

ISOWATT218 MECHANICAL DATA

| DIM. | mm | | | inch | | |
|------|-------|------|-------|-------|-------|-------|
| | MIN. | TYP. | MAX. | MIN. | TYP. | MAX. |
| A | 5.35 | | 5.65 | 0.211 | | 0.222 |
| C | 3.30 | | 3.80 | 0.130 | | 0.150 |
| D | 2.90 | | 3.10 | 0.114 | | 0.122 |
| D1 | 1.88 | | 2.08 | 0.074 | | 0.082 |
| E | 0.75 | | 0.95 | 0.030 | | 0.037 |
| F | 1.05 | | 1.25 | 0.041 | | 0.049 |
| F2 | 1.50 | | 1.70 | 0.059 | | 0.067 |
| F3 | 1.90 | | 2.10 | 0.075 | | 0.083 |
| G | 10.80 | | 11.20 | 0.425 | | 0.441 |
| H | 15.80 | | 16.20 | 0.622 | | 0.638 |
| L | | 9 | | | 0.354 | |
| L1 | 20.80 | | 21.20 | 0.819 | | 0.835 |
| L2 | 19.10 | | 19.90 | 0.752 | | 0.783 |
| L3 | 22.80 | | 23.60 | 0.898 | | 0.929 |
| L4 | 40.50 | | 42.50 | 1.594 | | 1.673 |
| L5 | 4.85 | | 5.25 | 0.191 | | 0.207 |
| L6 | 20.25 | | 20.75 | 0.797 | | 0.817 |
| N | 2.1 | | 2.3 | 0.083 | | 0.091 |
| R | | 4.6 | | | 0.181 | |
| DIA | 3.5 | | 3.7 | 0.138 | | 0.146 |

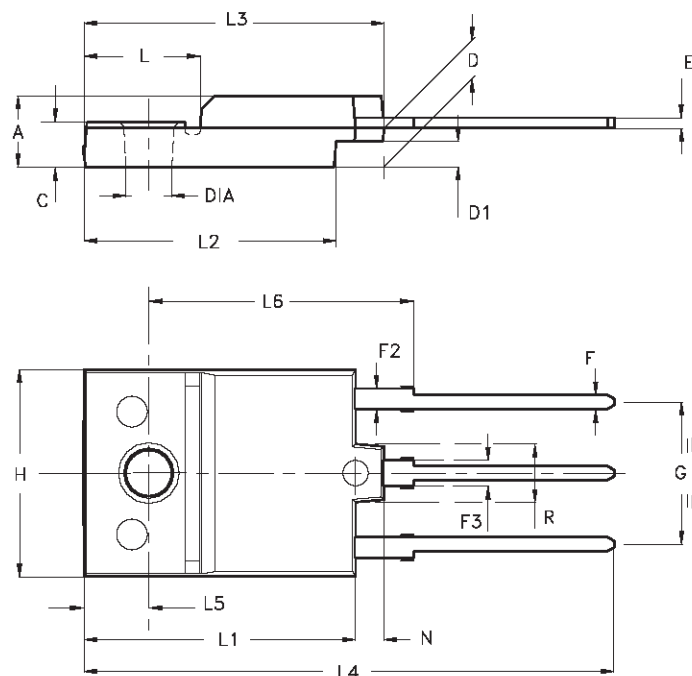

- Weight : 4.9 g (typ.)

- Maximum Torque (applied to mounting flange) Recommended: 0.8 Nm; Maximum: 1 Nm

- The side of the dissipator must be flat within 80 μ m

P025C/A

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specification mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a trademark of STMicroelectronics

© 1999 STMicroelectronics – Printed in Italy – All Rights Reserved

STMicroelectronics GROUP OF COMPANIES

Australia - Brazil - China - Finland - France - Germany - Hong Kong - India - Italy - Japan - Malaysia - Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - U.S.A.

<http://www.st.com>