

KGL4195KD

11.3 Gbps Modulator Driver IC

FEATURES

- Wide Temperature Range : from -40°C to 95°C
- Maximum Input Data Rate : up to 11.3Gbps
- Output Amplitude : up to 3.0Vpp
- Maximum Output Offset : 1.2V at 50Ω Load
- Crossing Point Controllability : 35% - 80%
- Small Package : 4 x 4 mm QFN
- Low Power Consumption



APPLICATIONS

- Sonet OC-192 / STM64 Transmission System up to 11.3Gbps
- WDM System
- 10GBE System
- Optical Transponder/Transceiver/Transmitters
- 300Pin / XENPAK / Xpak / X2 /XFP
- Sonet/SDH Test Equipment

GENERAL DESCRIPTIONS

KGL4195KD is a high performance electroabsolute modulator and direct modulated LASER diode driver IC for sonet/SDH and 10GBE applications up to 11.3Gbps.

The device provides typically 3.0Vpp output , output amplitude control, output offset control and output crossing point (X-Point) control.


KGL4195KD data input accepts single-ended or differential AC coupled signal. KGL4195KD supports differential DC coupled or AC coupled (using external bias tee) output.

The output amplitude is able to be controlled from 1.0Vpp up to 3.0Vpp by bias voltage of VC1. The output offset can be tuned over 1.2V by bias voltage VC2. The output crossing point (X-Point) is capable of adjusting from 35% to 80% of the output eye diagram via the differential voltage between VB1 and VB2.

KGL4195KD is very low power device, typical power consumption is 0.8W at output DC coupled and 2.5Vpp output amplitude / 1.0V output offset condition or 0.65W at output AC coupled using bias tee and 2.5Vpp output / no offset condition.

The package of KGL4195KD is 4 x 4mm QFN pacakge.

FUNCTION DIAGRAM

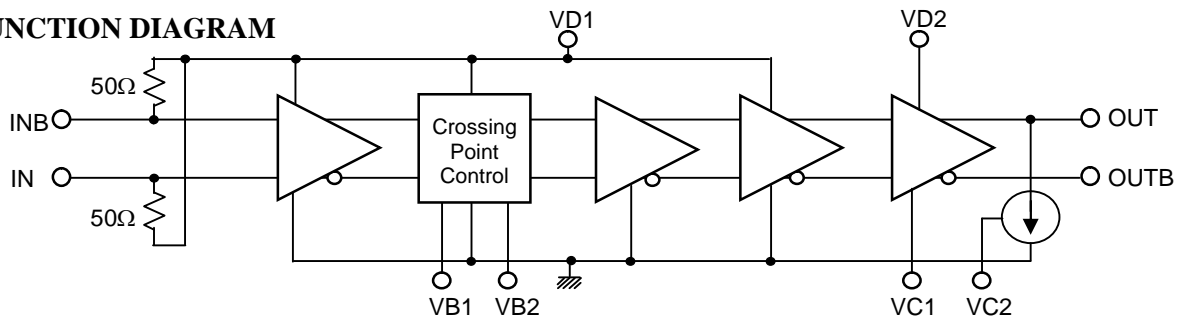

ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Min	Max	Unit	Note
Supply Voltage	VD1	-0.3	4.0	V	
Supply Voltage of Output Stage	VD2	-0.3	6.0	V	
X-Point Control and Reference Voltage	VB1/VB2	-1.0	2.4	V	
Output Amplitude Control Voltage	VC1	-1.0	1.6	V	
Output Bias Control Voltage	VC2	-1.0	2.6	V	
Input Amplitude	V _{in}	-	1.5	V _{pp}	AC coupled
Operating Temperature at Package Base	T _s	-40	100	°C	
Storage Temperature	T _{st}	-45	125	°C	

RECOMMENDED OPERATING CONDITIONS

Parameter	Symbol	Min	Typ	Max	Unit	Note
Supply Voltage	VD1	3.13	3.3	3.47	V	
Supply Voltage of Output Stage	VD2	4.75	5.0	5.25	V	Output DC coupled ²⁾
		3.13	3.3	3.47	V	Output AC coupled using bias tee ³⁾
X-Point Control Voltage	VB1	0.6	1.2	1.8	V	
X-Point Reference Voltage	VB2 ¹⁾	1.0	1.2	1.4	V	
Output Amplitude Control Voltage	VC1	0	-	1.2	V	
Output Bias Control Voltage	VC2	0	-	2.4	V	
Single-ended Input Amplitude	V _{in}	0.4	-	1.2	V _{pp}	AC coupled
Differential Input Amplitude		0.2	-	1.2	V _{pp}	AC coupled
Operating Temperature at Package Base	T _s	-40	-	95	°C	
Input Interface	AC coupled (External blocking capacitor is required)					
Output Interface	DC coupled (Need 50Ω termination to VD2) ²⁾ or AC coupled using bias tee ³⁾					

1) VB2 can be open or biased by the external circuit. For VB2 opened, VB2 is biased at about 0.364 x VD1.

2) Refer to TYPICAL APPLICATION (Output DC coupled) of page 5.

3) Refer to TYPICAL APPLICATION (Output AC coupled) of page 6.

ELECTRICAL CHARACTERISTICS**◆ TEMPERATURE RANGE -5°C ~ 85°C**

This table is electrical characteristics at “OUT” port.

Parameter	Symbol	Condition	Min	Typ	Max	Unit
Maximum Input Data Rate		NRZ	11.3	-	-	Gbps
Supply Current	Id1		-	90	135	mA
Supply Current	Id2	Condition2, No Offset, Maximum Amplitude	-	120	160	mA
		Condition1, Maximum Offset , Maximum Amplitude	-	160	-	mA
Power Consumption	Pw	Condition2, Amplitude 2.5Vpp, No offset	-	0.65	-	W
		Condition1, Amplitude 2.5Vpp, No Offset	-	0.8	-	W
Minimum Output Amplitude	Vo(min)	50 Ω load	-	1.0	1.2	Vpp
Maximum Output Amplitude	Vo(max)	Condition2, No Offset, Maximum Amplitude	2.6	3.0	-	Vpp
		Condition1, No Offset , Maximum Amplitude	2.7	3.0	-	
Amplitude Monitor Resistance	Rmod	Ta = R.T.	-	2.0	-	Ω
Output High Voltage	V(HI) ¹⁾	DC coupled, 50 Ω load, no offset	VD2-0.5	-	VD2	V
Output High Voltage Offset	Vo(ofs) ¹⁾	DC coupled, 50 Ω load	1.0	1.2	-	V
Minimum Output Low Voltage	V(LO)	DC coupled, 50 Ω load	-	1.4	1.6	V
Bias Monitor Resistance	Rbias	Ta = R.T.	-	2.0	-	Ω
X-Point Control Range	High	XPH	50 Ω load, NRZ	75	80	%
	Low	XPL		-	35	
X-Point Stability	Del (Xp)	50 Ω load, -5~85°C	-10	-	10	%
Output Rise/Fall Time	Tr/Tf	50 Ω load, 20%/80%	-	27	40	ps
Input Return Loss	S11	100kHz~10GHz	-	12	-	dB

Note) Condition1 : VD2=5.0V, 50Ω load, output DC coupled

Condition2 : VD2=3.3V, 50Ω load, output AC coupled

◆ Temperature range -40°C ~ 95°C


This table is electrical characteristics at “OUT” port.

Parameter	Symbol	Condition	Min	Typ	Max	Unit	
Maximum Input Data Rate		NRZ	11.3	-	-	Gbps	
Supply Current	Id1		-	90	140	mA	
Supply Current	Id2	Condition2, No Offset, Maximum Amplitude	-	120	166	mA	
		Condition1, Maximum Offset, Maximum Amplitude	-	160	-	mA	
Power Consumption	Pw	Condition2, Amplitude 2.5Vpp, No offset	-	0.65	-	W	
		Condition1, Amplitude 2.5Vpp, No Offset	-	0.8	-	W	
Minimum Output Amplitude	Vo(min)	50 Ω load	-	1.0	1.22	Vpp	
Maximum Output Amplitude	Vo(max)	Condition2, No Offset, Maximum Amplitude	2.4	3.0	-	Vpp	
		Condition1, No Offset, Maximum Amplitude	2.5	3.0	-		
Amplitude Monitor Resistance	Rmod	Ta = R.T.	-	2.0	-	Ω	
Output High Voltage	V(HI) ¹⁾	DC coupled, 50 Ω load, no offset	VD2-0.55	-	VD2	V	
Output High Voltage Offset	Vo(ofs) ¹⁾	DC coupled, 50 Ω load	0.9	1.2	-	V	
Minimum Output Low Voltage	V(LO)	DC coupled, 50 Ω load	-	1.4	1.6	V	
Bias Monitor Resistance	Rbias	Ta = R.T.	-	2.0	-	Ω	
X-Point Control Range	High	XPH	50 Ω load, NRZ	73	80	-	%
	Low	XPL		-	35	42	%
X-Point Stability	Del (Xp)	50 Ω load, -40~95°C	-12	-	12	%	
Output Rise/Fall Time	Tr/Tf	50 Ω load, 20%/80%	-	27	43	ps	
Input Return Loss	S11	100kHz~10GHz	-	12	-	dB	

Note) Condition1 : VD2=5.0V, 50Ω load, output DC coupled


Condition2 : VD2=3.3V, 50Ω load, output AC coupled

1) Output high voltage with offset control is defined by “V(HI)-Vo(ofs)”

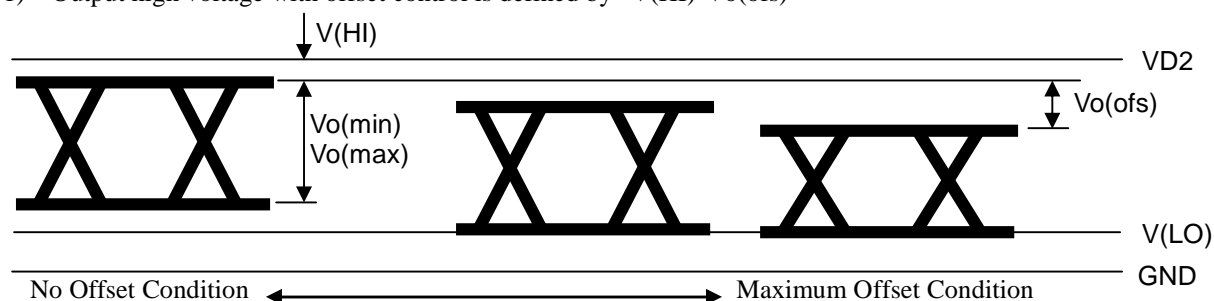

PACKAGE DIMENSIONS


(Top View)

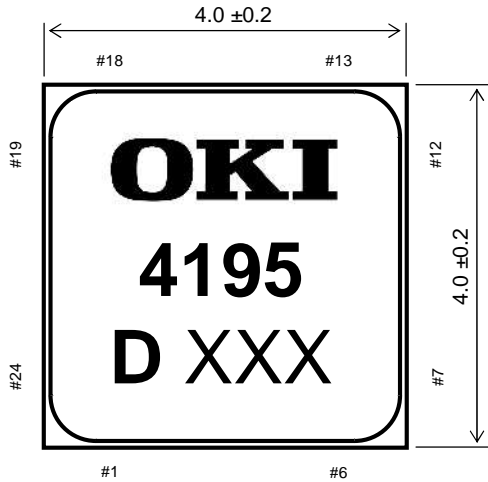

(Side View)



(Bottom View)

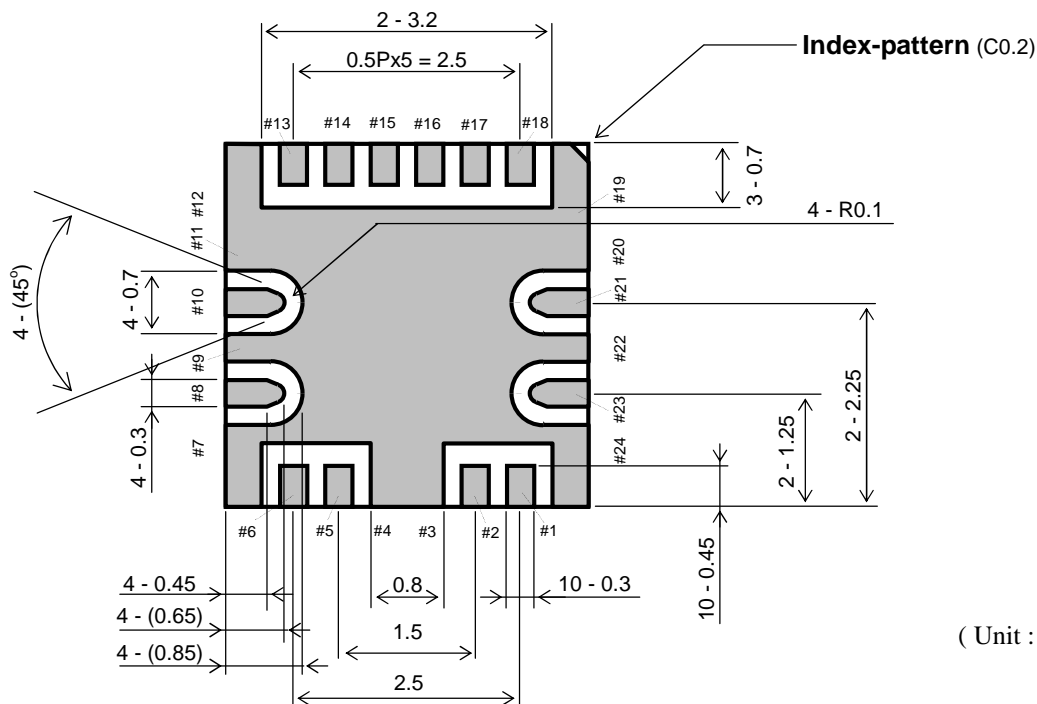


(Unit : mm)

PIN CONNECTION


No.	Symbol	Note
1	GND	Ground
2	GND	Ground
3	GND	Ground
4	GND	Ground
5	Rmod	Amplitude Monitor Output Port
6	Rbias	Bias Monitor Output Port
7	GND	Ground
8	OUT	Output Port
9	GND	Ground
10	OUTB	Inverted Output Port
11	GND	Ground
12	GND	Ground
13	VC2	Output Bias Control Port
14	VC1	Output Amplitude Control Port
15	VD2	Supply Voltage Port
16	VD1	Supply Voltage Port
17	VB2	X-Point Reference Port
18	VB1	X-Point Control Port
19	GND	Ground
20	GND	Ground
21	INB	Inverted Input Port
22	GND	Ground
23	IN	Signal Input Port
24	GND	Ground

Note : This package is non-hermetic. This package specification is subject to change without notice.

TYPICAL APPLICATION (DC coupled)

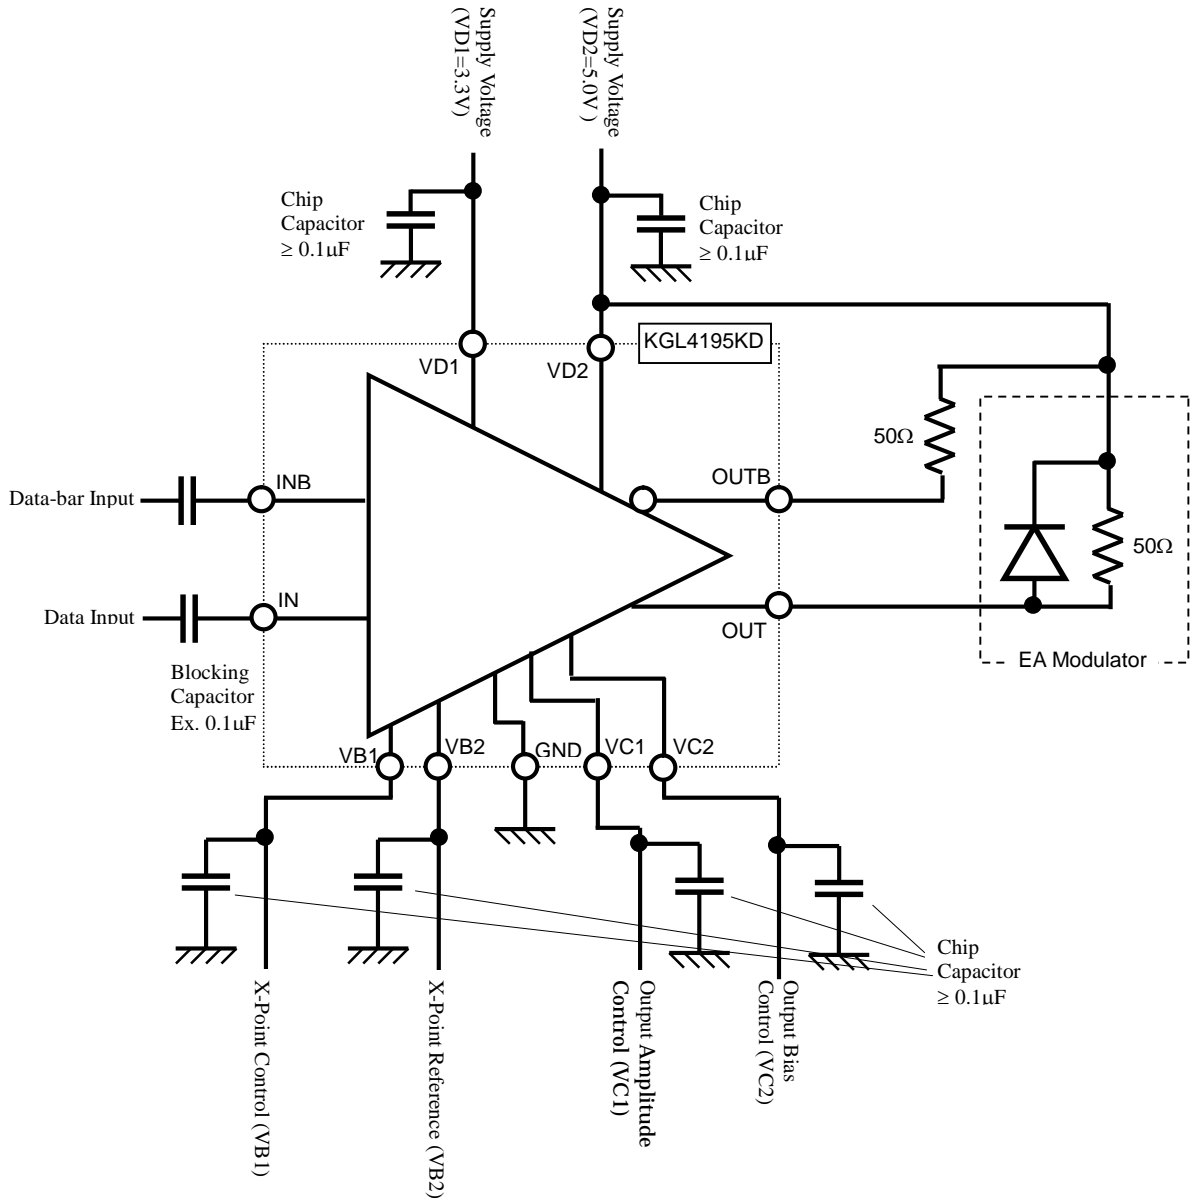

TYPICAL APPLICATION (AC coupled)

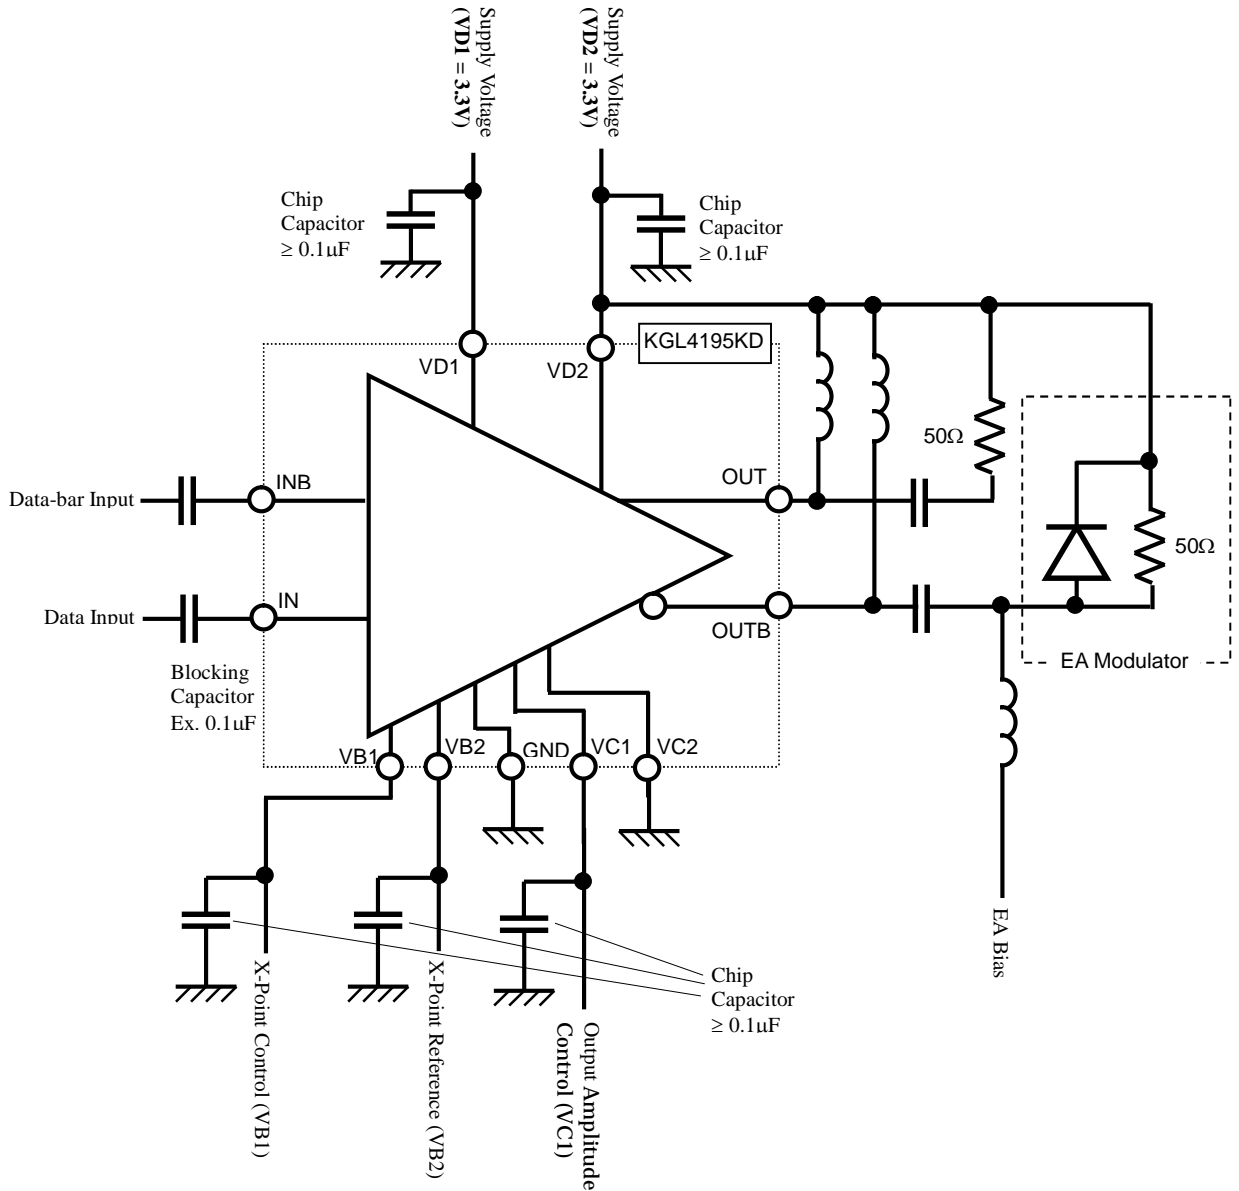

TYPICAL CHARACTERISTICS (OUTPUT DC COUPLED CONDITION)


Input Signal : 11.3Gbps, NRZ PN31, Differential 0.2Vp-p (each port)

VD1=3.3V, VD2=5.0V

Display Factor V:600mV/div, H:20ps/div


Test circuit diagram of these measurements is shown in page 8.

Maximum Amplitude

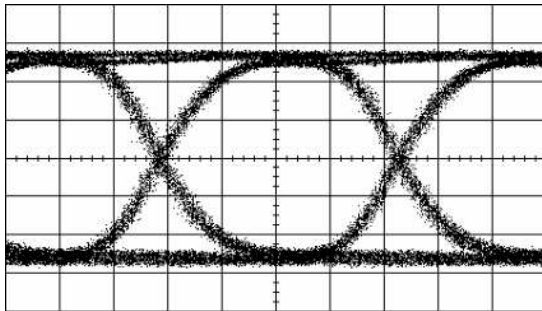


ID1 : 87.0mA
 ID2 : 114.6mA
 Power : 0.863W
 Amplitude : 3.10Vpp
 Tr/Tf : 27.6/26.2ps
 JitterPP : 11.1ps
 Xp : 49.7%

Minimum Amplitude

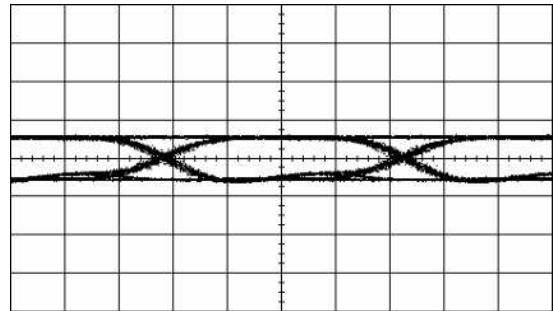


ID1 : 83.6mA
 ID2 : 23.6mA
 Power : 0.394W
 Amplitude : 0.649Vpp
 Tr/Tf : 25.8/20.0ps
 JitterPP : 11.7ps
 Xp : 50.5%

Crossing Point \cong 80%

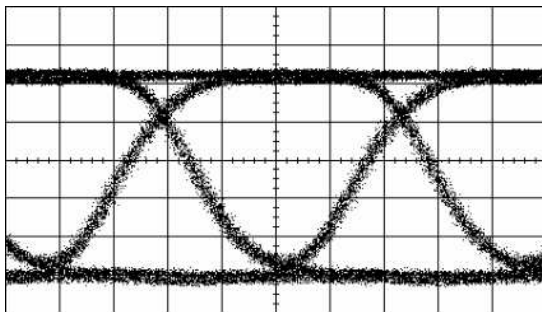


ID1 : 88.1mA
 ID2 : 114.6mA
 Power : 0.863W
 Amplitude : 3.08Vpp
 Tr/Tf : 27.6/26.7ps
 JitterPP : 12.8ps
 Xp : 80.0%

Amplitude Dependence

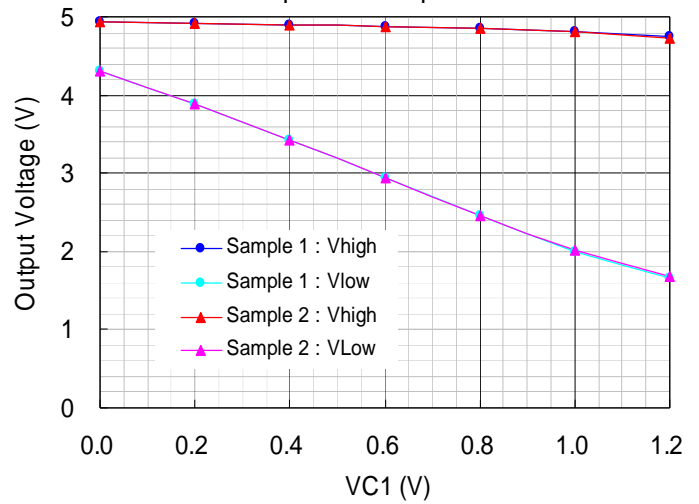

TEST CIRCUIT EXSAMPLE COMPATIBLE WITH OUTPUT DC COUPLED CONDITION)

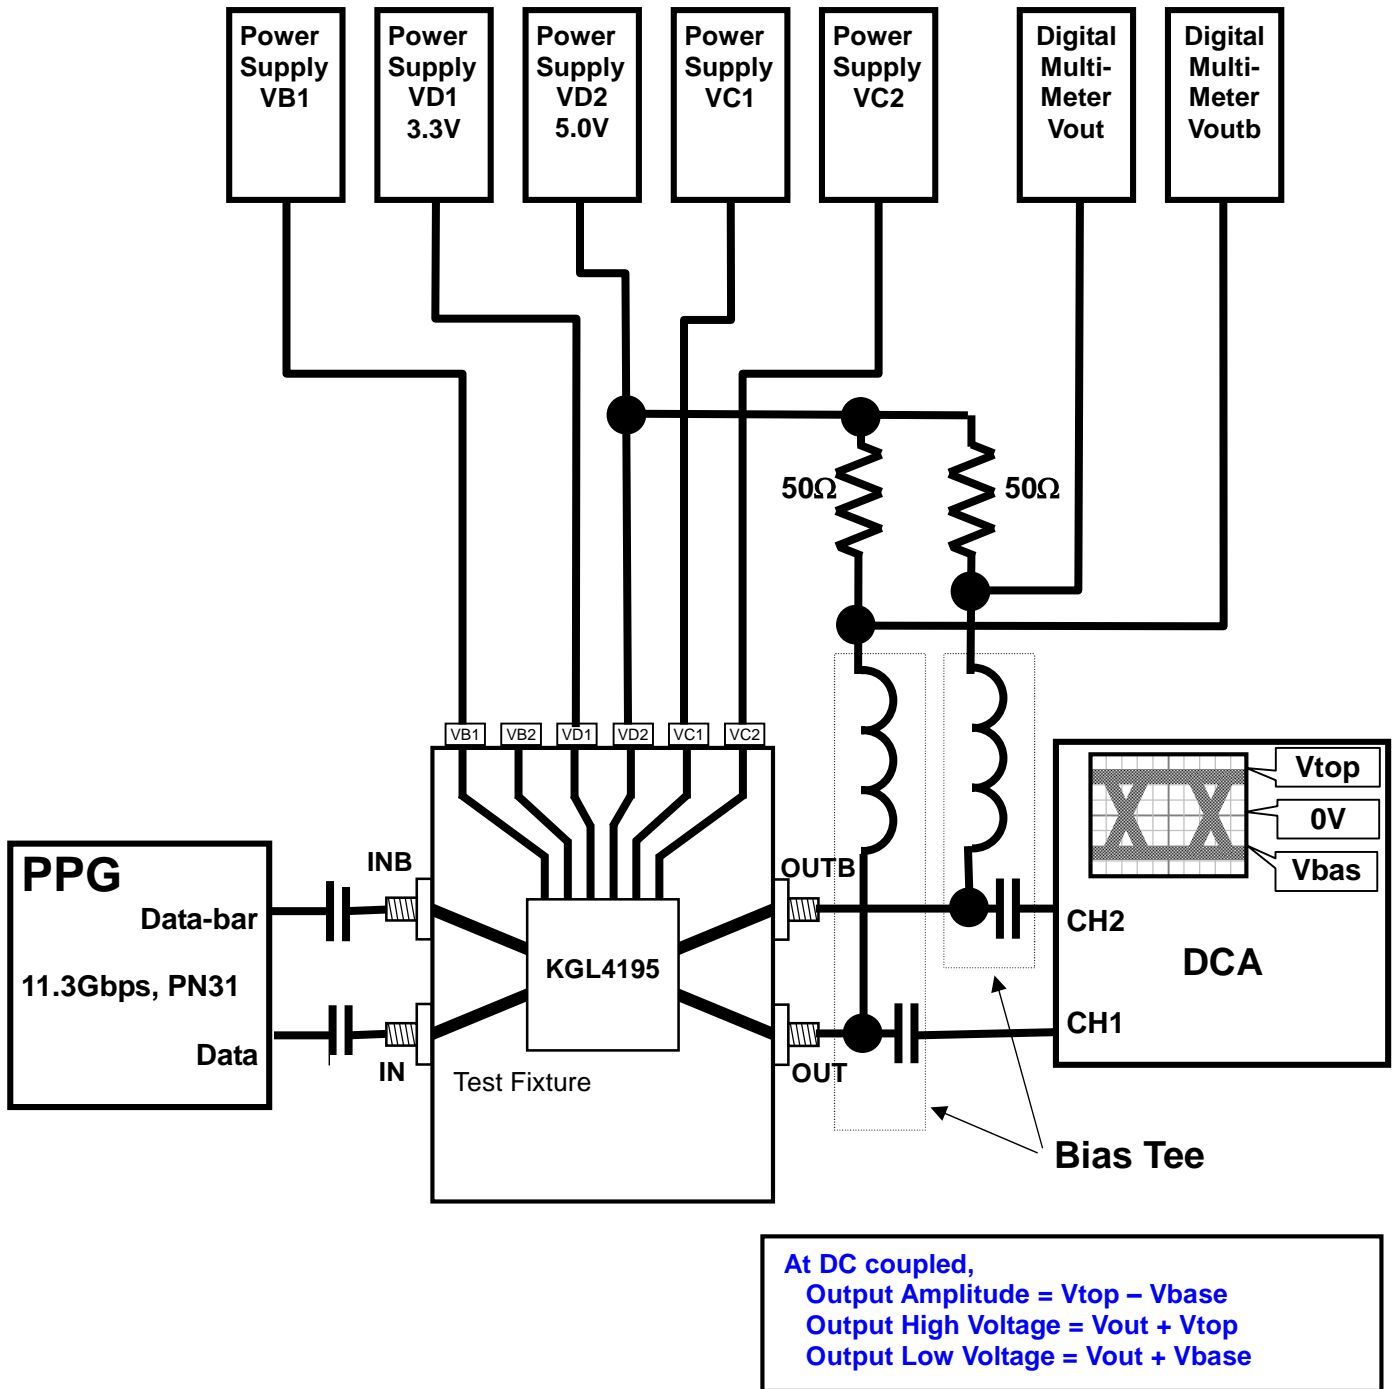

TYPICAL CHARACTERISTICS (OUTPUT AC COUPLED CONDITION)


Input Signal : 11.3Gbps, NRZ PN31, Differential 0.2Vp-p (each port)

VD1=3.3V, VD2=3.3V

Display Factor V:600mV/div, H:20ps/div


Test circuit diagram of these measurements is shown in page 10

Maximum Amplitude

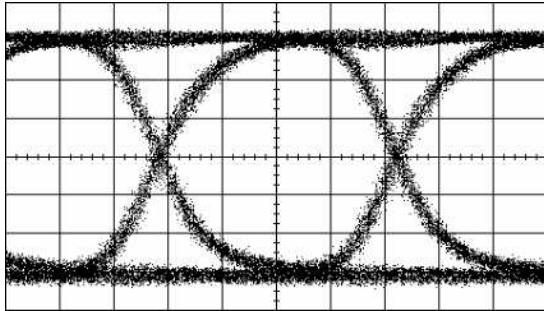


ID1 : 84.3mA
 ID2 : 112.7mA
 Power : 0.650W
 Amplitude : 3.01Vpp
 Tr/Tf : 27.1/25.8ps
 JitterPP : 10.8ps
 Xp : 50.1%

Minimum Amplitude

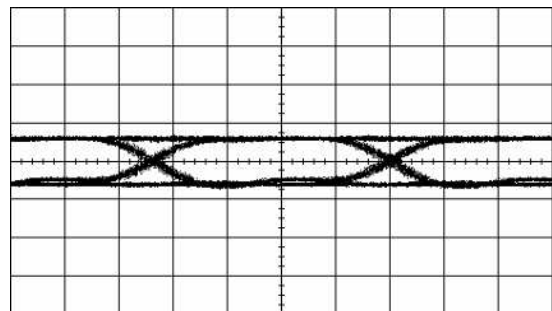


ID1 : 79.8mA
 ID2 : 20.8mA
 Power : 0.331W
 Amplitude : 0.58Vpp
 Tr/Tf : 20.4/18.7ps
 JitterPP : 10.9ps
 Xp : 49.2%

Crossing Point \cong 80%

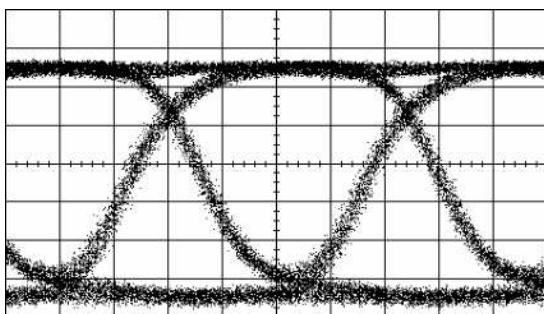


ID1 : 84.4mA
 ID2 : 112.6mA
 Power : 0.650W
 Amplitude : 2.86Vpp
 Tr/Tf : 27.1/25.3.ps
 JitterPP : 14.4ps
 Xp : 80.0%

Power VS Amplitude

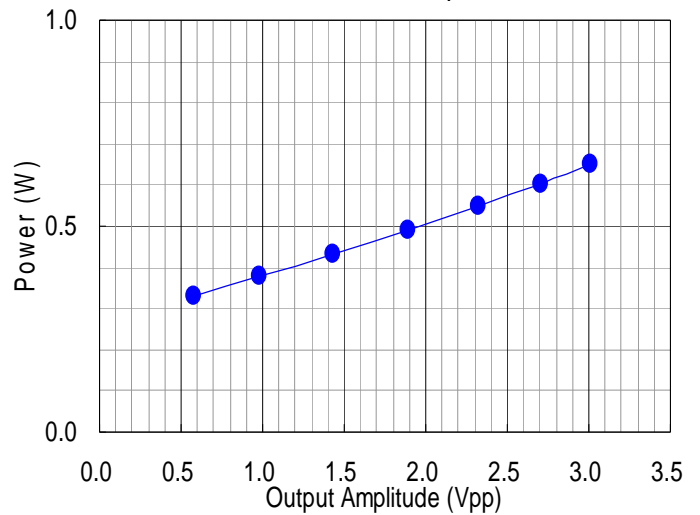

TEST CIRCUIT EXSAMPLE COMPATIBLE WITH OUTPUT AC COUPLED CONDITION)

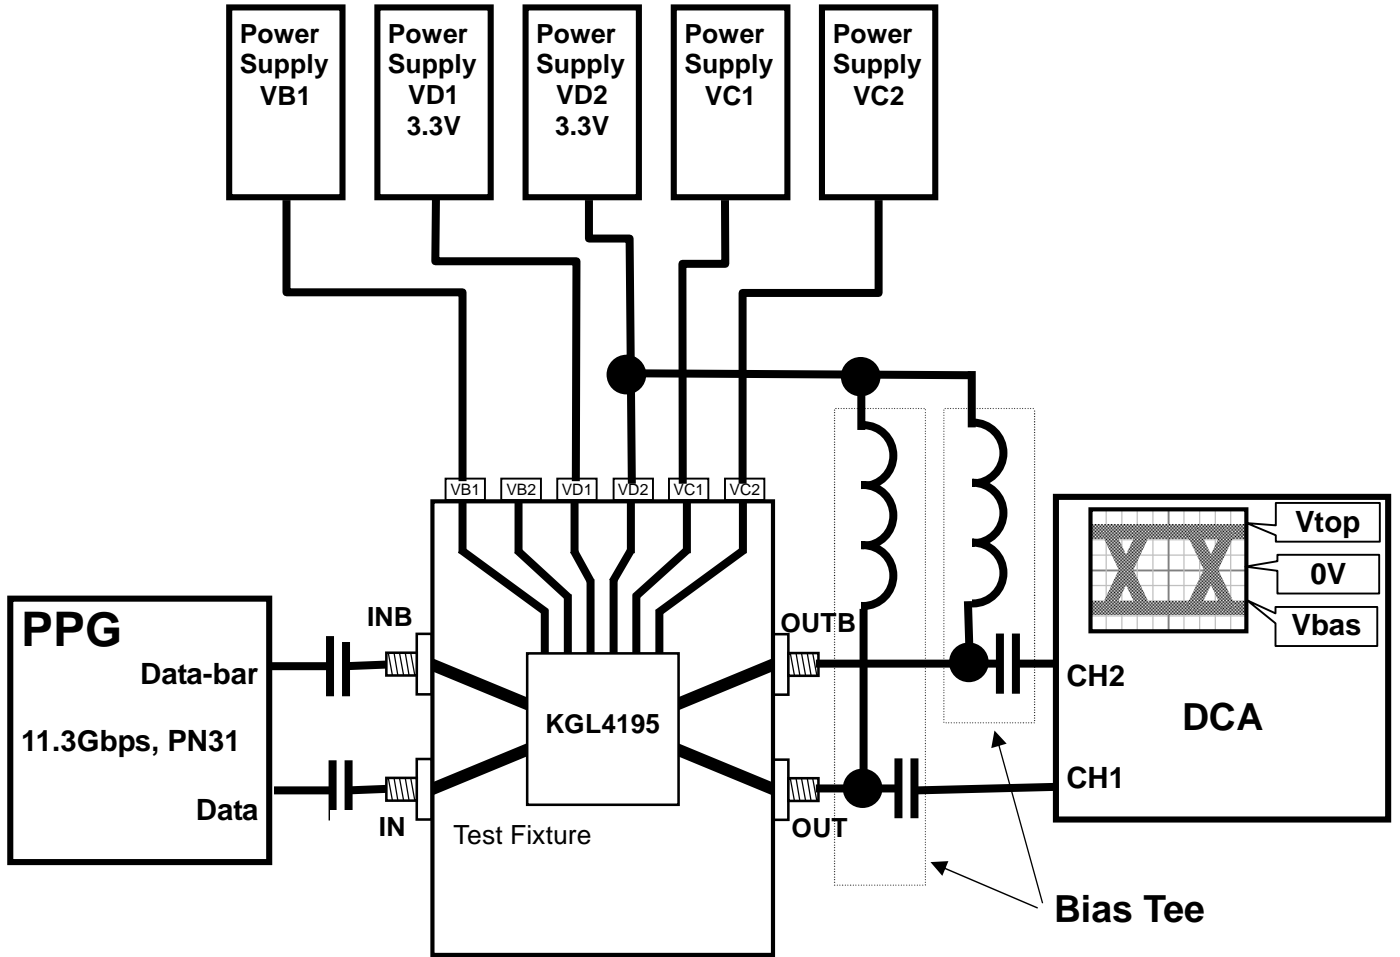

APPLICATION NOTE

1. For stable operation;

To prevent a dependence of “X-Point” on the supply voltage VD1,

Case 1 : VB2 is open

VB2 is biased at about $0.364 \times VD1$ (1.2V@VD1=3.3V) by the internal circuit.

Control VB1, so that the voltage difference “VB1–VB2” is constant.

Case 2 : VB2 is biased

Bias VB2 at about 1.2V by using the external voltage source independent of VD1.

Control VB1 by using the external voltage source independent of VD1.

2. Power-up/shut-down sequence;

For power-up, supply voltage (VD2) at first, next supply voltage (VD1), then control voltages (VB1, (VB2), VC1, VC2).

For shut-down, control voltages(VB1, (VB2), VC1, VC2). at first, next VD1, then VD2.

Customer does not need to care about the sequence for the control voltages (VB1,(VB2),VC1,VC2).

TYPICAL PCB LAYOUT AND ASSEMBLING INFORMATION

Please request us the application note named GTD18791 and GTD18806.

ESD CONSIDERATIONS

This device can be damaged by ESD; therefore appropriate precautions must be taken to avoid exposure to ESD and EOS during handling, assembly, and testing of these devices. Failure to adhere to proper ESD/EOS precautions during handling and assembly of these devices can damage or adversely affect device reliability.

SAFETY AND HANDLING INFORMATION ON GaAs DEVICES

Arsenic Compound (GaAs Devices)

The product contains arsenic (As) as a compound.

This material is stable for normal use, however, its dust or vapor may be potentially hazardous to the human body.

Avoid ingestion, fracture, burning or chemical treatment to the product.

- Do not put the product in your mouth.
- Do not burn or destroy the product.
- Do not perform chemical treatment for the product.

Keep laws and ordinances related to the disposal of the products.

NOTICE

1. The information contained herein can change without notice owing to product and/or technical improvements. Before using the product, please make sure that the information being referred to is up-to-date.
2. The outline of action and examples for application circuits described herein have been chosen as an explanation for the standard action and performance of the product. When planning to use the product, please ensure that the external conditions are reflected in the actual circuit, assembly, and program designs.
3. When designing your product, please use our product below the specified maximum ratings and within the specified operating ranges including, but not limited to, operating voltage, power dissipation, and operating temperature.
4. Oki assumes no responsibility or liability whatsoever for any failure or unusual or unexpected operation resulting from misuse, neglect, improper installation, repair, alteration or accident, improper handling, or unusual physical or electrical stress including, but not limited to, exposure to parameters beyond the specified maximum ratings or operation outside the specified operating range.
5. Neither indemnity against nor license of a third party's industrial and intellectual property right, etc. is granted by us in connection with the use of the product and/or the information and drawings contained herein. No responsibility is assumed by us for any infringement of a third party's right which may result from the use thereof.
6. The products listed in this document are intended for use in general electronics equipment for commercial applications (e.g., office automation, communication equipment, measurement equipment, consumer electronics, etc.). These products are not authorized for use in any system or application that requires special or enhanced quality and reliability characteristics nor in any system or application where the failure of such system or application may result in the loss or damage of property, or death or injury to humans. Such applications include, but are not limited to, traffic and automotive equipment, safety devices, aerospace equipment, nuclear power control, medical equipment, and life-support systems.
7. Certain products in this document may need government approval before they can be exported to particular countries. The purchaser assumes the responsibility of determining the legality of export of these products and will take appropriate and necessary steps at their own expense for these.
8. No part of the contents contained herein may be reprinted or reproduced without our prior permission.

Copyright 2006 Oki Electric Industry Co., Ltd