

# SGM4895 1.3W Fully Differential Audio Power Amplifier

### **GENERAL DESCRIPTION**

The SGM4895 is a fully differential audio power amplifier that is designed for portable communication device applications and demanding applications in mobile phones. It is capable of delivering 1.3W of continuous average power into an  $8\Omega$  load with typically 1% distortion (THD+N) from a 5V battery voltage. It operates from 2.5V to 5.5V power supply.

The SGM4895 features a low power consumption shutdown mode. To facilitate this, shutdown may be enabled by logic low. Additionally, the SGM4895 features an internal thermal shutdown protection mechanism.

The SGM4895 contains advanced pop/click circuitry, with a minimal amount of external components. All these features make SGM4895 ideal for wireless handsets and other low voltage applications where minimal power consumption is a primary requirement.

The SGM4895 is available in Green TDFN-3×3-8L and MSOP-8 (Exposed Pad) packages. It operates over an ambient temperature range of -40°C to +85°C.

### FEATURES

- Fully Differential Amplifier
- Excellent PSRR: Direct Connection to Battery
- 1.3W into 8Ω Load from 5V Supply at THD+N = 1% (TYP)
- 1.6W into 4Ω Load from 5V Supply at THD+N = 1% (TYP, SGM4895YDB8 Only)
- 2.5V to 5.5V Operation
- Low Shutdown Current
- Improved Pop/Click Circuitry
- Support Single-Ended or Differential Input
- Thermal Overload Protection Circuitry
- No Output Coupling Capacitors, Bootstrap Capacitors Required
- External Gain Configuration Capability
- -40°C to +85°C Operating Temperature Range
- Green TDFN-3×3-8L and MSOP-8 (Exposed Pad) Packages

### **APPLICATIONS**

Portable Systems Wireless Handsets Mobile Phone Handheld Computers PDAs GPS



# 1.3W Fully Differential Audio Power Amplifier

#### **PACKAGE/ORDERING INFORMATION**

MODEL	ORDER NUMBER	ORDER NUMBER PACKAGE PACKAGE DESCRIPTION OPTION		MARKING INFORMATION		
SGM4895	SGM4895YDB8/TR	TDFN-3×3-8L	Tape and Reel, 3000	SGM4895DB		
30114095	SGM4895YPMS8/TR	MSOP-8 (Exposed Pad)	Tape and Reel, 3000	SGM4895YPMS8		

### **ABSOLUTE MAXIMUM RATINGS**

Supply Voltage	6V
Input Voltage	
Storage Temperature Range	65°C to +150°C
Junction Temperature	150°C
Operating Temperature Range	40℃ to +85℃
Lead Temperature Range (Soldering 10	sec)


#### ESD Susceptibility

НВМ	2000V
MM	400V

#### NOTE:

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.


### PIN CONFIGURATIONS (TOP VIEW)



### CAUTION

This integrated circuit can be damaged by ESD if you don't pay attention to ESD protection. SGMICRO recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage. ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

SGMICRO reserves the right to make any change in circuit design, specification or other related things if necessary without notice at any time. Please contact SGMICRO sales office to get the latest datasheet.





### **1.3W Fully Differential** Audio Power Amplifier

# **ELECTRICAL CHARACTERISTICS**

(The following AC specifications apply for  $8\Omega \log A_V = 1V/V$ ,  $T_A = +25^{\circ}C$ , unless otherwise specified.)

PARAMETER	PARAMETER SYMBOL CONDITIONS		MIN	TYP	MAX	UNITS		
Supply Voltage	V+			2.5		5.5	V	
Shutdown Current	I <sub>SD</sub>	V <sub>IN</sub> = 0V, V <sub>SHDN</sub> = GND			0.01	1	μA	
		V <sub>IN</sub> = 0V, V <sub>SHDN</sub> = V <sub>+</sub> = 5.0V		-10	2.5	10		
Output Offset Voltage	Vos	$V_{IN} = 0V, V_{SHDN} = V_{+} = 3.3V$		-10	2.0	10	mV	
		V <sub>IN</sub> = 0V, V <sub>SHDN</sub> = V <sub>+</sub> = 2.6V			2.0			
			V <sub>+</sub> = 5.0V, No Load		4.70	7.50	mA	
			V+ = 5.0V, 8Ω Load		4.75	8.00		
Quiescent Power Supply Current	lo	$V_{IN} = 0V, I_{O} = 0A,$	V <sub>+</sub> = 3.3V, No Load		3.87	5.80		
Quescent i ower Supply Current	١Q	$V_{SHDN} = V_{+}$	V <sub>+</sub> = 3.3V, 8Ω Load		3.90	6.00		
			V+ = 2.6V, No Load		3.20			
			V <sub>+</sub> = 2.6V, 8Ω Load		3.22			
Shutdown Voltage Input High	V <sub>SDIH</sub>			1.2			v	
Shutdown Voltage Input Low						0.4	v	
			V <sub>+</sub> = 5.0V		1.30			
		f = 1kHz	V+ = 3.6V		0.65			
		THD+N = 1%	V <sub>+</sub> = 3.0V		0.45			
Output Power (8Ω)	P.		V <sub>+</sub> = 2.6V		0.34		w	
	Po	f = 1kHz THD+N = 10%	V+ = 5.0V		1.60		- VV -	
			V <sub>+</sub> = 3.6V		0.82			
			V+ = 3.0V		0.55			
			V <sub>+</sub> = 2.6V		0.42			
	Po	f = 1kHz THD+N = 1% SGM4895YDB8 only	V <sub>+</sub> = 5.0V		1.60		- W	
			V+ = 3.6V		1.00			
			V <sub>+</sub> = 3.0V		0.65			
Output Power (4Ω)			V+ = 2.6V		0.50			
	гo		V <sub>+</sub> = 5.0V		2.20			
		f = 1kHz THD+N = 10%	V <sub>+</sub> = 3.6V		1.25			
		SGM4895YDB8 only	V+ = 3.0V		0.85			
		····,	V <sub>+</sub> = 2.6V		0.60		1	
Total Harmonic Distortion + Noise	THD+N	P <sub>o</sub> = 0.6Wrms, f = 1kHz,	V <sub>+</sub> = 5.0V		0.015		%	
			V <sub>+</sub> = 5.0V		-83			
		f = 217Hz	V <sub>+</sub> = 3.6V		-80			
		1 - 217112	V+ = 3.0V		-73		]	
Power Supply Rejection Ratio (1) (2)	PSRR		V <sub>+</sub> = 2.6V		-65		dD	
Power Supply Rejection Ratio	FORK		V <sub>+</sub> = 5.0V		-83		dB	
		f = 1kHz	V <sub>+</sub> = 3.6V		-80			
			V <sub>+</sub> = 3.0V		-73			
			V+ = 2.6V		-65		<u> </u>	
Common Mode Rejection Ratio <sup>(2)</sup>	CMRR	f = 217Hz, V <sub>CM</sub> = 200mV	<sub>P-P</sub> , V <sub>+</sub> = 5.0V		-76		dB	
		С <sub>в</sub> = 1µF	V <sub>+</sub> = 5.0V		50			
Wake-Up Time			V+ = 3.6V		42		ms	
	T <sub>wu</sub>		V <sub>+</sub> = 3.0V		37			
			V <sub>+</sub> = 2.6V		32			

NOTES:

1.  $10\Omega$  terminated input.

2. PSRR and CMRR are affected by the matching between gain-setting resistor ratios.




10

1

### **TYPICAL PERFORMANCE CHARACTERISTICS**


At  $T_A$  = +25°C,  $A_V$  = 1, f = 1kHz,  $C_B$  = 1µF, unless otherwise noted.

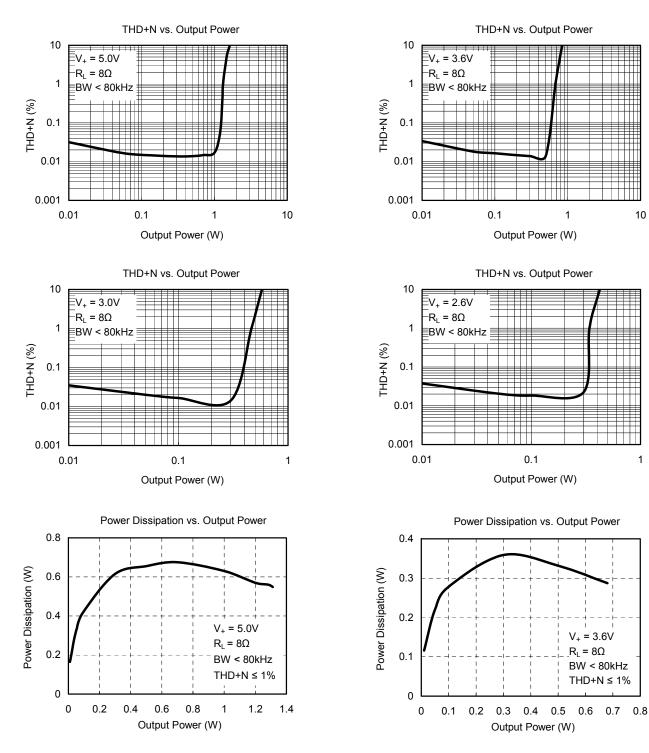




### **TYPICAL PERFORMANCE CHARACTERISTICS**


At  $T_A$  = +25°C,  $A_V$  = 1, f = 1kHz,  $C_B$  = 1µF, unless otherwise noted.

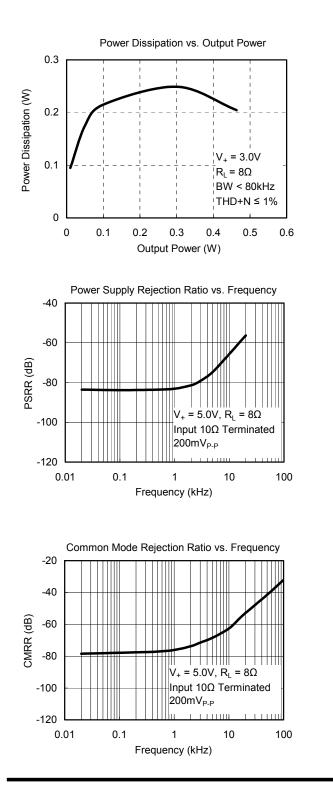

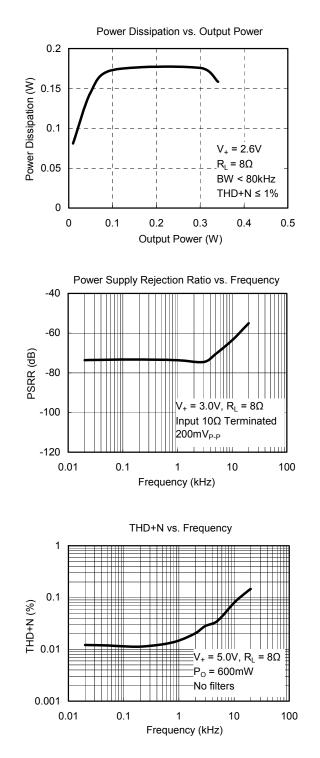

### **TYPICAL PERFORMANCE CHARACTERISTICS**


At  $T_A$  = +25°C,  $A_V$  = 1, f = 1kHz,  $C_B$  = 1µF, unless otherwise noted.

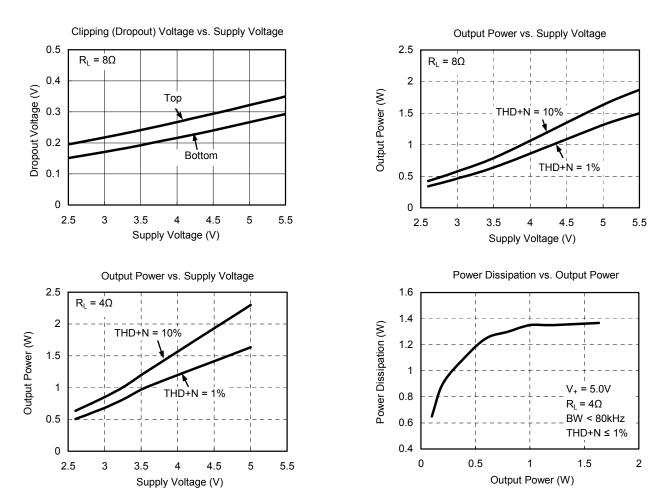



### **1.3W Fully Differential** Audio Power Amplifier

### **TYPICAL APPLICATIONS**

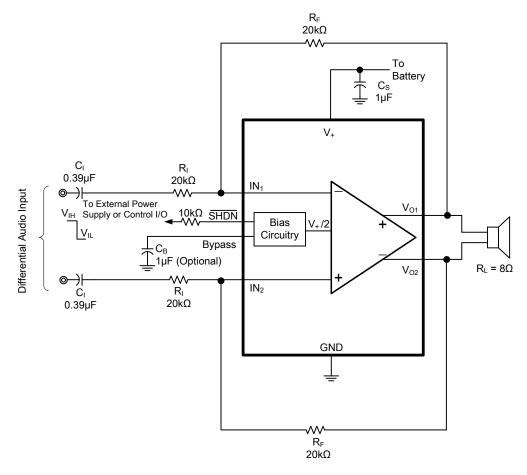


NOTE: A 10k $\Omega$  resistor must be serially connected to  $\overline{\text{SHDN}}$  pin.

Figure 1. Typical Differential Input Application Schematic



### 1.3W Fully Differential Audio Power Amplifier

### **TYPICAL APPLICATIONS**

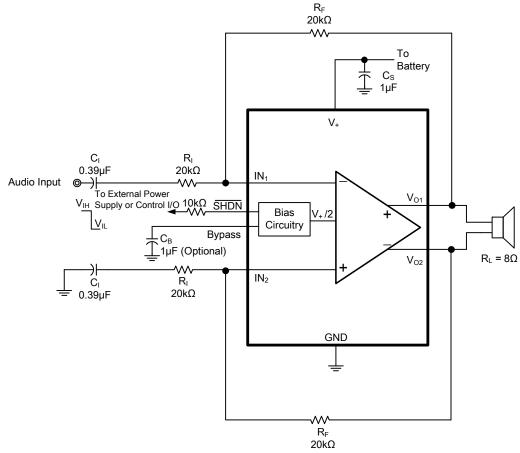

NOTE: A 10k $\Omega$  resistor must be serially connected to  $\overline{SHDN}$  pin.

Figure 2. Single-Ended Input Application Schematic



### **APPLICATION NOTES**

#### PCB Design Recommendations (Thermal Design Considerations)

With proper thermal design considerations, SGM4895YDB8 is capable of delivering 1.6W of continuous average power into a  $4\Omega$  load at 5V power supply.

#### Thermal Land

The TDFN-3×3-8L thermal land is a metal (normally copper) region centrally located under the package and on top of the PCB. It has a rectangular or square shape and should match the dimensions of the exposed pad on the bottom of the package (1:1 ratio).

For certain high power applications, the PCB land may be modified to a "dog bone" shape that enhances thermal performance. The packages used with the "dog bone" lands will be a dual inline configuration (see Figure 3).




Figure 3. Dog Bone

#### **Thermal Vias**

Thermal vias are necessary. They conduct heat from the exposed pad of the package to the ground plane. The number of vias is application specific and is dependent upon electrical requirements and power dissipation.


The via diameter should be 0.2mm to 0.33mm with 1oz. copper via barrel plating. It is important to plug the via to avoid any solder wicking inside the via during the soldering process. The thermal vias can be tented with solder mask on the top surface of the PCB. The solder mask diameter should be at least 75microns (or 3mils) larger than the via diameter. The solder mask thickness should be the same across the entire PCB.

A package thermal performance may be improved by increasing the number of vias.



## PACKAGE OUTLINE DIMENSIONS

TDFN-3×3-8L

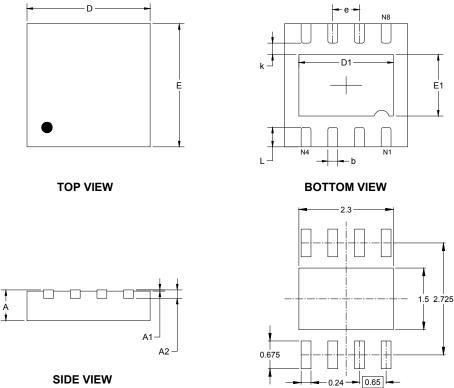

SIDE VIEW


#### RECOMMENDED LAND PATTERN (Unit: mm)


Symbol	-	nsions meters	Dimensions In Inches			
	MIN	MAX	MIN	MAX		
A	0.700	0.800	0.028	0.031		
A1	0.000	0.050	0.000	0.002		
A2	0.203	B REF	0.008 REF			
D	2.900	3.100	0.114	0.122		
D1	2.200 2.400		0.087	0.094		
E	2.900 3.100		0.114	0.122		
E1	1.400	1.600	0.055	0.063		
k	0.200 MIN		300.0	MIN		
b	0.180	0.300	0.007	0.012		
е	0.650 TYP		0.026	6 TYP		
L	0.375	0.575	0.015	0.023		




## PACKAGE OUTLINE DIMENSIONS


### MSOP-8 (Exposed Pad)





RECOMMENDED LAND PATTERN (Unit: mm)






Symbol		nsions meters	Dimensions In Inches		
-	MIN	MAX	MIN	MAX	
A	0.820	1.100	0.032	0.043	
A1	0.020	0.150	0.001	0.006	
A2	0.750	0.950	0.030	0.037	
b	0.250	0.380	0.010	0.015	
с	0.090	0.230	0.004	0.009	
D	2.900	3.100	0.114	0.122	
D1	1.700	1.900	0.067	0.075	
е	0.65 BSC		0.026	BSC	
E	2.900	3.100	0.114	0.122	
E1	4.750	5.050	0.187	0.199	
E2	1.450 1.650		0.057	0.065	
L	0.400	0.800	0.016	0.031	
θ	0°	6°	0°	6°	



### TAPE AND REEL INFORMATION

#### **REEL DIMENSIONS**

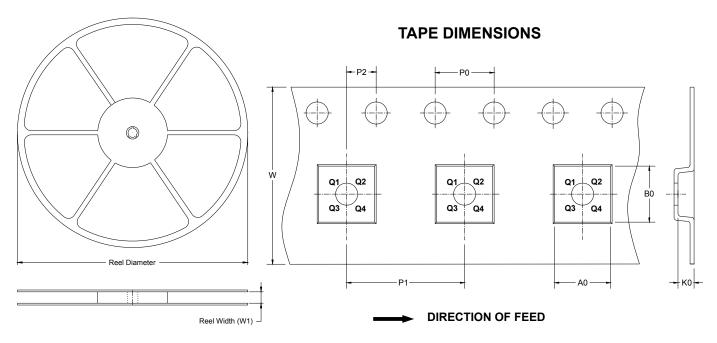


NOTE: The picture is only for reference. Please make the object as the standard.

#### KEY PARAMETER LIST OF TAPE AND REEL

Package Type	Reel Diameter	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P0 (mm)	P1 (mm)	P2 (mm)	W (mm)	Pin1 Quadrant
MSOP-8 (Exposed Pad)	13″	12.4	5.2	3.3	1.5	4.0	8.0	2.0	12.0	Q1
TDFN-3×3-8L	13″	12.4	3.35	3.35	1.13	4.00	8.00	2.00	12.00	Q1



#### **CARTON BOX DIMENSIONS**



NOTE: The picture is only for reference. Please make the object as the standard.

#### **KEY PARAMETER LIST OF CARTON BOX**

Reel Type	Length (mm)	Width (mm)	Height (mm)	Pizza/Carton
13″	386	280	370	5

